



WR136G

AC2100
Dual Band Gigabit
WiFi Router





WR136G Homenet Router is a strong wireless dual-band gigabit router specially designed for large-sized apartments with over 100Mbps FTTH network

It adopts the MTK mainstream chip solution. It has a larger data cache space to guarantee game acceleration and more functions. The built-in independent PA / LNA signal enhancement module and external 6 high-gain omnidirectional antennas produce strong signal penetration performance, which truly helps to achieve the full coverage of dual-band Wi-Fi in house and apartments.

WR136G provides a maximum wireless access rate of 2100Mbps, 1 Gigabit WAN port, and 4 Gigabit LAN ports.

Main Features




Dual-band WiFi



IPV6



TR069



Gigabit Ports



Access Control



Multicast



MU-MIMO



OTA




VPN



Guest Wi-Fi



Power
2.4G Wi-Fi
5G Wi-Fi

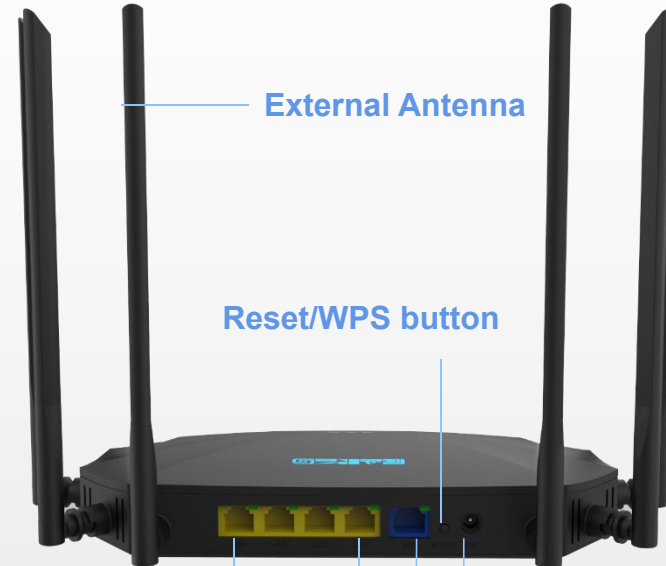

External Antenna
Reset/WPS button
4xLAN Interface
1xWAN Interface
Power Input

Application scenario



With innovative MU-MIMO (11AC Wave 2.0), WR136G can communicate with multiple devices at a time, shortening latency and improving quantities of connected devices.



Hardware Features



Name	AC2100 Wireless Router	
Model	WR136G	
CPU	MTK CPU MT7621A	
Memory /Storage	128MB/16MB	
Wi-Fi Antennas	2×2.4GHz 4×5GHz External 7dBi Gain	
Protocol	IEEE 802.11a/b/g/n/ac	
Wi-Fi Speed	2.4G Wi-Fi (Speed 300Mbps) 5G Wi-Fi (Speed 1733Mbps)	
LED	Power	Green: Power on Off: Power off
	2.4G Wi-Fi	Green:2.4G Wi-Fi up Off:2.4G Wi-Fi down
	5G Wi-Fi	Green:5G Wi-Fi up Off:5G Wi-Fi down

Interface	WAN	1 RJ45 port ,10/100/1000Mbps
	LAN	4 RJ45 port ,10/100/1000Mbps
	Reset	Button
Transmit Power	2.4G	20dBm
	2.4G enhanced	23dBm
	5G	20dBm
Power Supply	DC12V/1.5A Adapter	
Power Consumption	<13W	
Dimension	234x148x31mm	
Operating Temperature	-10 ~ 50°C	
Storage Temperature	-40 ~ 85°C	

Software Features



IP Protocols	IPv4/IPv6	Guest Wi-Fi	2.4G Guest SSID 5G Guest SSID
WAN Mode	Dynamic IP Static IP PPPoE	Parental Controls	Limited Time DD/MM Monday to Sunday
Security	Firewall Access Control IP & MAC Binding MAC/IP/URL/Port Filter Application Layer Gateway DDoS Attack Prevention	Equipment Mode	Router Bridge Relay
System Service	DDNS Telnet Server DMZ Host UPnP Remote WEB OTA Upgrade Diagnosis NTP	Management	WEB Telnet TR069
		System log	System log
		Multicast	IPTV IGMP
		QoS	Speed limit

Product Model	Product Description
WR136G-M12	1*10/100/1000Base-Tx Ethernet WAN port, 4*10/100/1000Base-Tx Ethernet LAN ports, external 6*7dBi antennas, built-in 2.4G PA, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac protocol, wireless transmission rate 2100Mbps, 12VDC power supply.
WR136G-M10	1*10/100/1000Base-Tx Ethernet WAN port, 4*10/100/1000Base-Tx Ethernet LAN ports, external 6*7dBi antennas, support 2.4G/5G dual frequency, support 802.11a/b/g/n/ac protocol, wireless transmission rate 2100Mbps, 12VDC power supply.

Contact Us

Shenzhen Ceres Technology Co., Ltd.
Address: Floor 6, Building F, Songbai Road 1008,
Sunshine Community, Xili Street, Nanshan District,
Shenzhen(518108)

Tel: +86-755-26014509/4710/4711
Fax: +86-755-26014506
Email: marketing@cerestec.com
Website: www.szceres.com